


GARDEN TRACTOR TIRE CHAIN INSTALLATION



Step 1. Lay chains out flat, removing all tangles. When chains are placed on tire, cross chain hook eyes must face away from the tire. Damage to your tires could result if hooks face against tire.



Step 2. Lay chain over tire, cross chain hooks up and fastener on outside of tire. Tuck first cross chain under tire.

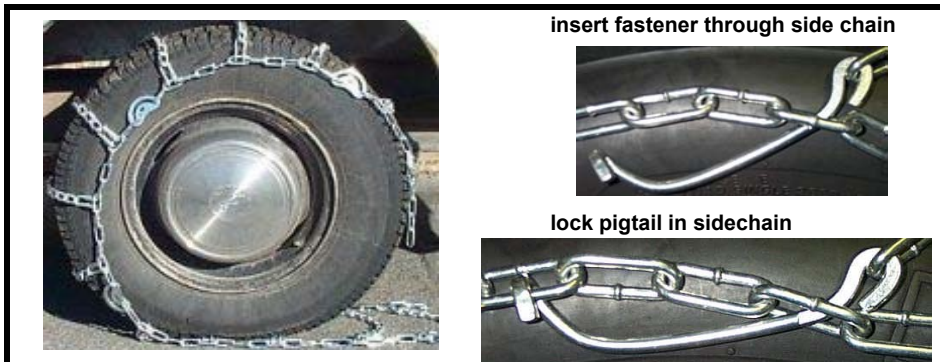

Step 3. Move tire until fasteners are axle high. Hook inside fastener first. Remove slack and hook outside fastener. Make chain as tight as possible by hand without the use of tools.

Note: To insure maximum life and performance of your tire chains, tire chains must be installed as tight as possible. **Optional tensioners are recommended.** spring type shown below.



Step 4. Install the optional tensioner

ADJUSTMENT: Tire chains are designed to fit a range of tire sizes and tread designs. The overall length of the chains may be longer than necessary. As long as the cross chain width is correct, the overall length can be shortened by removing 1 (or more) cross chains by prying the cross chain hook open and removing the entire cross chain. The hooks holding the cross chain to the side chain are not hardened and can be opened with a chisel or vise.

Important!! Prefit prior to use. Maximum speed is 5 MPH. Buyer shall not be entitled to recover any incidental or consequential damages. No compensation will be made for labor claim, delays, or damages incurred by using our products. Caution: All traction products will wear out with use. If this should occur, stop immediately and repair or replace. Tirechain.com and South Fork Hardware are not responsible for injury or vehicle damage.